

Sectional Garage Doors

More convenience and security every day





2
(
8
12
14
18
22
26
28
30
34
38
40
44
47

Some of the doors shown are equipped with optional extras and do not always correspond to our standard models.

The surface finishes and colours shown are subject to the limitations of the printing process and cannot be regarded as binding.

All rights reserved. No part may be reproduced without our prior permission. Subject to changes.

Hörmann brand qualityReliable and future-oriented







Brand quality from Germany

All doors and operator components developed and manufactured by Hörmann are well matched to each other as well as being tested and certified by independent, recognised institutes to ensure your safety. All doors are manufactured according to the DIN EN 9001 quality management system and meet the requirements of European standard 13241-1. Furthermore, our experienced employees work intensively on new products, continual further developments and improvements to details, which contributes to our patents and good products on the market.

Garage doors for generations

Endurance tests under real conditions ensure mature series products with Hörmann quality. Thanks to good technical solutions and uncompromising quality assurance, you will receive a reliable warranty on all sectional doors and operators.

Competent advice


Experienced specialists from our customer-orientated sales organisation accompany you from the planning stage, through technical clarification up to the final building inspection. Complete working documentation, such as technical manuals, is not only available in printed form, apart from that it is always accessible and up-to-date at www.hoermann.com.

"A good reputation must be earned."

August Hörmann (1886-1944)

In line with the founder's philosophy, the Hörmann brand today is a true promise of quality. The family-owned company has more than 80 years of experience in door and operator construction and is one of the leading manufactures in Europe, with sales of over 20 million doors. This makes a Hörmann sectional door a reassuring purchase.

 $_{5}$





Sectional doors open vertically upwards and are suspended under the ceiling to save space. This construction principle means you can make full use of the space inside and in front of the garage. Additionally, sectional garage doors can be fitted in every garage door opening, providing you with a wider passage in width and better sealing.

Treat yourself to this comfort and convenience.





Narrow passage width with old up-and-over doors

Complete passage width with modern sectional doors



For various fitting situation

The shape of the garage door opening is not of prime importance. Whether square, angled, with segmental or full centred arch – a sectional door always fits.

Wider passage

With older up-and-over doors, driving in and out is often a matter of millimetres. Sectional doors with a passage width extended by up to 14 cm also make it much easier to park modern, larger vehicles and SUVs.

Sealed all-round

Flexible and weather-resistant seals on all four sides of Hörmann's sectional doors keep out the wind, rain and snow. Good-quality intermediate seals between the door sections of double-skinned doors provide for additional sealing. Thanks to its large-sized profile lip, the bottom seal can easily accommodate slight irregularities in the floor.

Good reasons to try Hörmann

Delicate appearance

Good reasons to try HörmannInnovations from the market leader



Elegant surface decors to choose

Hörmann provides various surface finishes to meet various kinds of requirements. Woodgrain surface finish is standard in RAL 9016, Grey RAL 9002, White aluminum RAL 9006 and Anthracite grey RAL 7016, optionally in around 200 colours from the RAL colour chart. Micrograin is standard in Traffic white RAL 9016, Grey RAL 9002, White aluminum RAL 9006 and Anthracite grey RAL 7016. We also provide Decograin surface finishes in Golden Oak and Rosewood.

Automatic door locking

Uninvited guests barely stand a chance with Hörmann automatic sectional doors. When the garage door is closed, the anti-lift kit automatically engages in the operator boom's stop, it then locks immediately and is secured against forced opening. This door latching functions pretty good, and in contrast to competitor operators, continues to secure the door even when the power fails.

Also resistant to waterlogging

A non-brittle, 4 cm plastic frame shoe offers long-term protection against corrosion (even with waterlogging) that is unmatched by competitor solutions. The frame shoe completely covers the frame in the area susceptible to rust. Only this offers true long-term protection. Together with the door's bottom seal, the frame shoe makes for a bottom edge that is visually appealing.

With thermal break between the frame and the building structure

A well-insulated garage door is always recommended when the garage and the home are directly connected. To further improve the already good insulation values, Hörmann has developed the ThermoFrame frame connection, a plastic profile that can be simply fitted together with the door frame.

This creates a thermal break between the frame and the brickwork, improving thermal insulation by up to 15 %* . The optional ThermoFrame frame connection is available for all Hörmann sectional doors.

^{*} With a door surface of 5000 x 2125 mm



Tested safety

Hörmann automatic sectional doors have been tested and certified by TÜV in accordance with the TTZ directive "Break-in resistance for garage doors".

Good reasons to try Hörmann

Hörmann BiSecur: The modern radio system for garage door and entrance gate operators









Fascia panels as standard

Side wall fitting, no problem

Bi-directional radio system BiSecur

Make up for insufficient headroom

For garage doors, the fascia panel is a good practical solution to make up for insufficient headroom. For all door versions, our standard fascia panels always match the door colour or style and can thus be visibly mounted in the opening. The standard single-skinned fascia panel which is 95 mm high can meet most situations.

Properly adjusted installation solution

The sectional door frame can be fitted to the side wall of the garage with Hörmann universal anchors. Irregularities in the wall can be easily compensated, leaving the reveal intact.

The modern radio system

for garage door and entrance gate operators

Our bi-directional, good-security BiSecur radio system is based on future-oriented technology that allows you to conveniently and safely operate garage doors, entrance gates, lights and much more.

With a stable, interference-free range, the newly developed, secure BiSecur encryption protocol makes sure that no-one can copy your radio signal. Tested and certified by security experts at the Bochum University and as safe as online banking.

Convenient inquiry of the door position

You no longer have to go out in all kinds of weather to check if your garage door is closed. With a single push of a button, the LED colour on the hand transmitter HS 5 BS shows you whether the door is open or closed. If required, another push of a button closes the

Double-skinned steel sectional door LPU 42

Good thermal insulation and wide variety of surface finishes


Woodgrain

Overview of steel sectional doors

Styles and dimensions

LPU

Double-skinned LPU 42 doors offer good insulation. Moreover, the 42-mm-thick sections give the door the greatest stability and make for quiet operation.

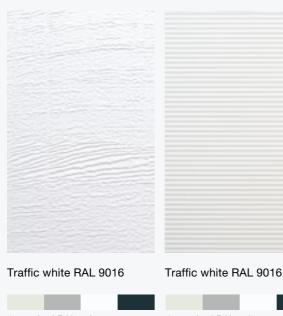

Decograin



Golden Oak

4 standard RAL colours

4 standard RAL colours

Micrograin

RAL to choose

Woodgrain is standard in Traffic white RAL 9016, Grey RAL 9002, White aluminum RAL 9006 and Anthracite grey RAL 7016, optionally in around 200 colours from the RAL colour chart.

The surfaces are well protected against rust. Rain Anthracite grey RAL 7016. runs off without leaving any streaky marks thanks to the use of hot-galvanised material and a good-quality polyester-primer coating on both sides. A grey haze from air pollution is largely prevented.

On this inexpensive, robust surface with an authentic sawn timber look, minor scratches can be easily repaired by working with the texture.

Door styles

M-ribbed S-panelled This surface features a wave profile that is embossed into smooth steel, producing attractive light and shadow effects.

Micrograin is standard in Traffic white RAL 9016, Grey RAL 9002, White aluminum RAL 9006 and

Door styles L-ribbed

Decograin is available in two natural-looking timber designs. An embossed wood grain gives it all the aesthetics of timber. The door remains beautiful for a long time thanks to the surface protection of the UV-resistant plastic film coating on the outside of the steel sections.

This finely structured surface is an ideal choice for price-conscious owners and is suited for modern homes.


Door styles M-ribbed

S-panelled

L-ribbed

Ordering width 6000 mm Ordering height 3034 mm

L-ribbed design is only available on Micrograin surface.



M-ribbed

Ordering width 6000 mm Ordering height 3034 mm

M-ribbed design is available on both Woodgrain and Decograin surface.







S-panelled (433 x 307 mm)


Ordering width 6000 mm Ordering height 3034 mm

S-panelled design is available on Woodgrain and Decograin surface.







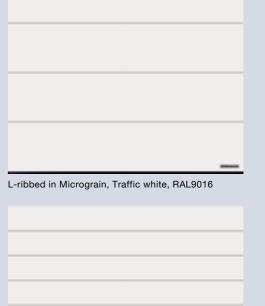



S-panelled in Woodgrain, Traffic white, RAL 9016



L-ribbed with the surface finish Micrograin RAL 7016

15

L-ribbed

Sturdy steel panels







L-ribbed in surface finish Micrograin, RAL 7016



L-ribbed with the surface finish Micrograin, RAL 9016







Micrograin

Traffic white RAL 9016, Grey RAL 9002, White aluminum RAL 9006 and Anthracite grey RAL 7016 as standard.

Max. dimensions

Ordering width 6000 mm Ordering height 3034 mm



M-ribbed

The door style for modern architecture



M-ribbed with the surface finish Decograin Rosewood

M-ribbed

More surface finishes to choose



M-ribbed with the surface finish Decograin Golden Oak



M-ribbed with surface finish Woodgrain in RAL 9016



M-ribbed with the surface finish Woodgrain in colour Anthracite grey, RAL 7016

M-ribbed

M-ribbed with the surface finish Woodgrain in CH 703



Woodgrain

Traffic white RAL 9016, Grey RAL 9002, White aluminum RAL 9006 and Anthracite grey RAL 7016 as standard, other RAL colours are optionally available.

Decograin

Golden Oak Rosewood

Max. dimensions

Ordering width 6000 mm Ordering height 3034 mm The door style for classic buildings



S-panelled with the surface finish Woodgrain in the preferred colour Anthracite grey, RAL 7016

22 ₂₃

Panelled

Available for full ordering sizes



S-panelled with the surface finish Woodgrain in Traffic white, RAL 9016

S/U-panelled

Woodgrain

Traffic white RAL 9016, Grey RAL 9002, White aluminum RAL 9006 and Anthracite grey RAL 7016 as standard, RAL to choose

Decograin

Golden Oak Rosewood

Max. dimensions

Ordering width 6000 mm Ordering height 3034 mm




S-panelled


S-panelled with the surface finish Decograin Golden Oak



Door Handles

It is your choice

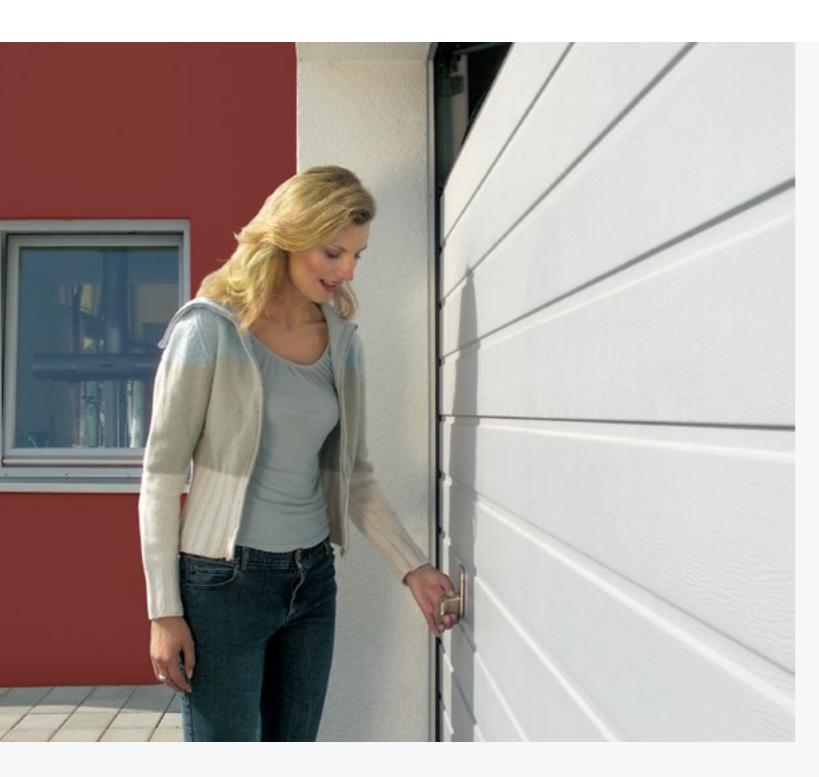



For sectional garage doors without a second access door, we recommend the emergency release with door handle to deal with the emergency situation (e.g. in the event of a power failure). You can easily open the garage door manually from the outside by using the key and handle as well as the clutch pull wire connected to it internally.



Black plastic



Polished stainless steel




Brushed stainless steel



White cast aluminium, RAL 9016 steel




Silver cast aluminium



Brown cast aluminium, RAL 8028



Exterior handle with keys

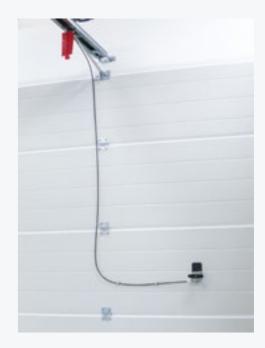

Interior handle with Bowden cable

Glazings





Clear synthetic glazing from Hörmann comes as standard with DURATEC glazing. It offers max. scratch resistance




Aluminium frame

Available for both panelled and ribbed design.

The anodised aluminium glazing frame (DIN 17611) in a natural finish E6 / C0 (previously E6 / EV 1) is available on request in door colour. You can choose the glazing with double synthetic panes in a clear version or crystal structure.



Classic glazing





Sunrise glazing



Modernise and improve

Hörmann offers ideal solutions for every fitting and renovation situation



It is an exciting and pleasant experience to renovate your old garage door. The key point is to select the correct products: Hörmann can not only provide garage doors with various dimensions and finishes, but also multiple mounting methods based on the opening structure of garage doors, so as to tackle any possible problems during the door's renovation.



Experienced consultation from Hörmann



Your Hörmann partners will gladly explain the benefits of a sectional garage door.



Your door is fitted within a day – of course with operator plus convenient remote control

Everything from a single source with your Hörmann partner

Your Hörmann service partner can make modernisation easier than you think: from personal consultation to proper disassembly and environmentally-friendly disposal of your old door, as well as correct dimensioned fitting.

Trouble-free, simple fitting

For standard fitting, Hörmann delivers the sectional doors with all necessary fitting material, makes the fitting and maintenance more simple and easy.

Neat gap treatment for an attractive appearance

Hörmann offers attractive solutions for every fitting situation. This saves fitting time and reduces costs. Visible gaps between frames and the reveal can thus be covered with a frame covering, an optional retrofit fascia or a fascia frame set. Of course, all this comes in surface finishes and colours that match the door.

Properly mounted and fitted

Standard fitting and special anchors for side fixing

Properly adjusted

[5]

Frame covering and fascia panels




Standard fitting

The sectional door can be fitted behind the opening [1]. The reveal guarantees stable fitting. This allows the frame to be screwed directly into the wall behind

Ideally, the available garage has at least 115 mm of clearance in the lintel area and a 90 mm sideroom.

Hörmann sectional doors come with all the necessary fitting materials for this situation.

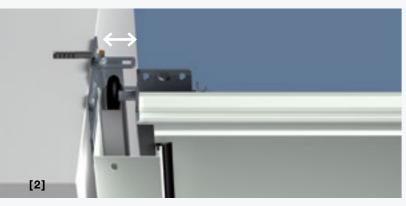



wall of the garage with Hörmann's universal anchors. Irregularities in the wall can be easily compensated, leaving the reveal intact.

- [2] Fitting with up to 35 mm wall spacing
- [3] Fitting with angled or irregular side wall



If the door is fitted in the opening by side fixing anchor, the ordering width and ordering height of the door should be reduced accordingly.

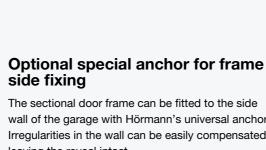



[4] Fitting with non-load bearing facades (facing brick or thermal insulation) with at least 90 mm sideroom



Frame covering in the colour of the door

At Hörmann, side frames are delivered in smooth white as standard. With a frame covering that matches the door sections' colour or decor, you can also achieve a harmonious appearance for doors with different surface

[5] [6] 90-mm-wide frame covering for fitting behind the opening, with little sideroom



Standard fascia panels

For standard fitting behind the opening with small lintel space

For all door versions, our standard fascia panels always match the door colour or style and can thus be visibly mounted in the opening.





Double-skinned fascia panels

For fitting in the opening with larger gap to the ceiling A matching, double-skinned additional fascia panel covers the gap between the ceiling and fascia panel. It is available for all surface finishes and colours or designs.



Garage door and entrance gate operators: Well matched from a single source



Sophisticated and innovative technology that makes your life more convenient and safe.

More information can be found in the Garage door and entrance gate operators brochure.

Three operator variants

Security both day and night with automatic locking


SupraMatic P4

- Energy saving LED* lights for the garage
- Low power consumption in standby below 1 watt
- 75 % faster opening speed compare to the ProMatic 3 operator
- Smart operation with the BlueSecur app
- Net worked with Smart Home systems via the standard HCP interface
- Standard with HSE 4 BS hand transmitter



ProMatic 4

- Energy saving LED* lights for the garage
- Low power consumption in standby below 1 watt
- 40 % faster opening speed compare to the ProMatic 3 operator
- Net worked with Smart Home systems via the standard HCP interface
- Standard with HSE 4 BS hand transmitter

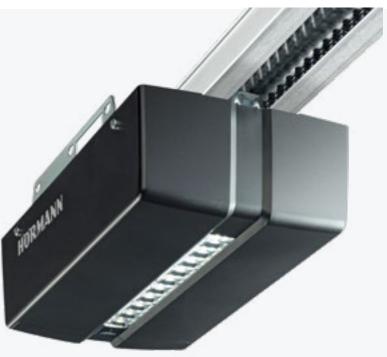






Standard 4-button hand transmitter HSE 4 BS, textured surface black with chrome caps



Garage door operators	ProMatic 4	SupraMatic P
Bluetooth receiver	Optional (HET-BLE	Integrated,
	receiver)	can be switched on and off
HCP bus connection	Integrated	Integrated
Cycles per day / hour	25 / 10	50 / 10
Pull and push force	600 N	750 N
Peak force	750 N	1000 N
Max. opening speed	20 cm/s	25 cm/s**
Lighting	10 LED lights	30 LED chase light
Max. door width	5000 mm	6000 mm
Max. door surface	11 m²	15.2 m²

- $^{\star}~$ 5 times brighter with the SupraMatic P in comparison to the ProMatic series 3 $\,$
- ** Up to 9 m² door leaf surface with SupraMatic P, up to max. 22 cm/s for larger door surfaces

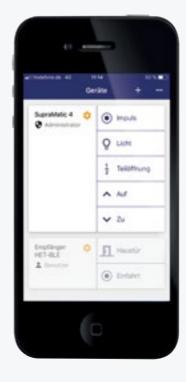

Standard Bluetooth receiver in SupraMatic 4 for smartphone operation using the Hörmann BlueSecur app



SupraMatic HT

Smart operator

More power, more function and faster speed Standard with black HS 5 BS hand transmitter For garage doors in size from 15.2 m²



Increased security

Families with children particularly appreciate extra safety. A photocell installed in the garage opening immediately stops the door before it encounters an obstruction, which needs just a little bit extra expense but for a more extensive protection.

 $_{36}$





Hand transmitter HS 5 BS

- 4 button functions plus query button,
- [1] High-gloss white
- [2] Black textured surface // NEW



Hand transmitter HS 4 BS

- 4 button functions,
- [3] high-gloss black

Hand transmitter HS 1 BS

- 1 button function,
- [4] high-gloss black



Hand transmitter HSE 4 BS

- 4 button functions,
- [5] Black textured surface with plastic caps // NEW



Fingerscan FL 12/FL 100

- Up to 12 fingerprints can be taught in
- Setting / programming via DIL switches on the interior device
- Impulse duration: 0.5 s or 5 s

FL 100:

- Up to 100 fingerprints can be taught in
- Setting / programming via 3 buttons and two 7-segment displays on the interior device
- Impulse duration: programmable from 0.5 s - 90 s



Code switch CTR 1b/3b

CTR 1b: 1 relay output for control of one door operator

CTR 3b: 3 separate relay outputs for the control of 2 operators and/ or choosing the direction, second opening height, yard illumination, Stop



Transponder key switch in two versions TTR100/TTR1000

You simply hold the coded transponder key approx. 2 cm in front of the reader. Two keys are included, further keys are available on request.

The comfortable TTR can recognse up to 100 keys and TTR 1000 up to 1000 keys.



Key switch STUP, STAP

For recessed or surface mounting in two versions, each with three keys.



Photocell EL 101

For indoor use as additional safety device





Technically mature

Operating comfort with good security



Safety while operating the garage door is important for Hörmann. Hörmann sets the standards for this with its innovative solutions. This has been proved again and again through numerous Hörmann patents.

And this provides you and your family with safety during daily use.











Tension spring assembly with spring-in-spring system

Hörmann sectional doors with double tension springs and double cables per side safeguard the door leaf against crashing to the floor. Thanks to the patented spring-in-spring system, broken springs are prevented from flying out and causing injuries.

Sectional doors up to 3000 mm wide and 2625 mm high include the proven tension spring technology as standard.

Torsion spring technology with integrated spring safety device

Hörmann sectional doors incorporate torsion springs on both sides featuring a patented spring safety device. In the event of a spring breaking, they arrest the door immediately, thereby preventing the door leaf from crashing to the floor. Larger sectional doors feature torsion spring technology.

Secure guidance of the door in safety tracks

Adjustable, patented track rollers, sturdy roller holders and safety tracks ensure that there is no danger of the door "derailing". The door sections are safely parked under the ceiling.

Finger trap protection on the inside, outside and on the hinges

The unique form of the door sections eliminates trap points, both between the sections and on the hinges. This reliable finger trap protection is offered by Hörmann.

Trap guard on the side frame

With Hörmann, the frames are completely closed from top to bottom. There are no gaps between the door leaf and frame in which fingers could get trapped!



Safety features in accordance with European standard 13241-1


Anti-fall safeguard / trap protection

Hörmann sectional doors are tested and certified in accordance with the good safety requirements of European standard 13241-1, not only on their own but also in combination with operators. It would be hard to find a safer sectional door.

Hörmann garage door is your ideal choice!

Good thermal insulation

Tested and certified

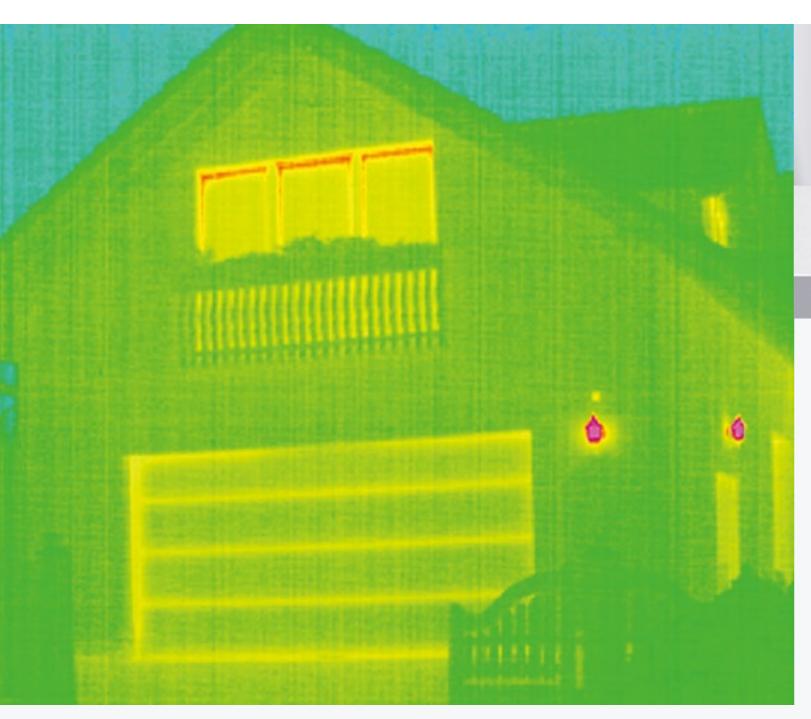

A well insulated garage door is always recommended when the garage and the home are directly connected. The ThermoFrame frame connection further improves the already good insulation values of the double-skinned Hörmann sectional garage doors.

This reduces your energy costs.



ThermoFrame Improved thermal insulation for sectional doors

The plastic profile that can be simply fitted together with the door frame, creates a thermal break between the frame and the brickwork, improving the thermal insulation by up to 15 %*.

In addition, extra lip seals on both sides and in the upper section of the door provide better sealing while lowering the loss of heating energy from the garage interior.

The ThermoFrame frame connection is optionally available for all Hörmann sectional garage doors.



Performance characteristics according to European standard 13241-1

At Hörmann, the four important characteristics of thermal insulation, acoustic insulation, tightness and sealing, and wind load for garage doors are tested and certified.

Thermal insulation

Section	$U = 0.5 \text{ W/(m}^2 \cdot \text{K)}$
Door leaf	$U = 0.9 \text{ W/(m}^2 \cdot \text{K)}$
Fitted door 1)	$U = 1.4 \text{ W/(m}^2 \cdot \text{K)}$

Acoustic insulation R = approx.25 dB

Air M-ribbed Class 2
L-ribbed and Panelled Class 3

Water Class 3 2)

Wind load Class 3

^{*} For door size 5000 × 2125 mm

 $^{^{9}\,}$ The U-values apply to fitted doors without glazing in the size: 5000×2125 mm

²⁾ Up to 70 Pa water pressure


Dimensions and fitting data

Size ranges

Dimensions and fitting data

Track applications and fitting dimensions

Size range

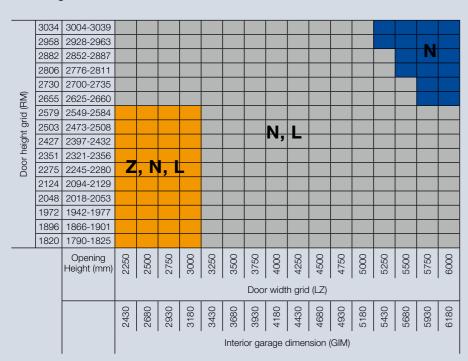

Standard in Z track application (Headroom 115 mm), N track and L track are available to choose. Standard in N track application (Headroom 210 mm), L track is available to choose. Standard in N track application (Headroom 390 mm).

Track applications


		Track applocation Z		Track application N		Track application L		
		Min. DE**	LDH	Min. DE** For yellow and grey area	Min. DE** For blue area	LDH	Min. DE**	LDH*
	3034			3244	3424	3034	3149	3004
	2958			3168	3348	2958	3073	2928
Door height grid (RIM)	2882			3092	3272	2882	2997	2852
	2806			3016	3196	2806	2921	2776
	2730			2940	3120	2730	2845	2700
	2655			2865	3045	2655	2770	2625
	2579	2694	2549	2789	2969	2579	2694	2549
	2503	2618	2473	2713	2893	2503	2618	2473
	2427	2542	2397	2637	2817	2427	2542	2397
	2351	2466	2321	2561	2741	2351	2466	2321
	2275	2390	2245	2485		2275	2390	2245
	2124	2239	2094	2334		2124	2239	2094
	2048	2163	2018	2258		2048	2163	2018
	1972	2087	1942	2182		1972	2087	1942
	1896	2011	1866	2106		1896	2011	1866
	1820	1935	1790	2030		1820	1935	1790
	Clear fram	ne dimensio	ns	F-	T Distance	e hack	Dimer	nsions in mm

- LZ Clear frame dimensions
- RM Grid height
- Clear passage height
- Track application L:
- * With doors over 3010 mm wide, the clear passage is reduced by
- Inside garage dimension
- Distance back ET
- Ceiling height
- Track application N:
- Track application Z/L:

 ** With ThermoFrame and operator + 30 mm


* With ThermoFrame and operator + 45 mm

Track Applications




Track application Z

Tension spring track application with torsion spring technology Max. ordering width 3000 mm Max. ordering height 2579 mm



Track application N


Normal track application with torsion spring technology Max. ordering width 6000 mm Max. ordering height 3034 mm



Track application L

Low-headroom tracks with torsion spring technology Max. ordering width 6000 mm Max. ordering height 3034 mm

Horizontal view

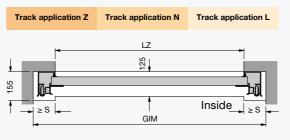



For ordering size in white area, S ≥90 and GIM ≥ LZ+180; For ordering size in blue area, S ≥125 and GIM ≥ LZ+250;

Fitting with track applications Z, N, L


Overall length operators	Track application Z	Track application N	Track application L
FS-K (3200 mm)	1820-2125	1820-2250	1820-2125
FS-M (3450 mm)	2126-2375	2251-2503	2126-2375
FS-L (4125 mm)	2376-2579	2504-3034	2376-3034

Vertical views

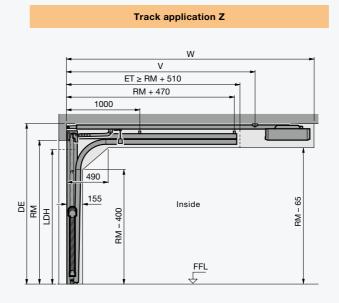

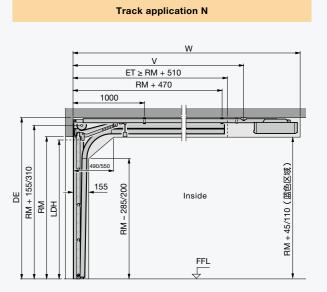

Track application L

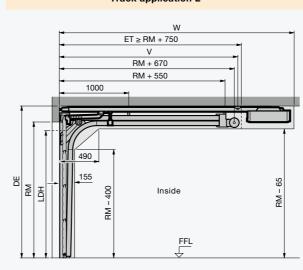

Dimensions in mm



Experience Hörmann quality

For every application involving new construction and modernisation

Hörmann provides a good basis for comprehensive planning. Carefully matched solutions offer you the well designed products for every area.

Garage doors

Well match your personal architectural style: up-and-over or sectional doors with colourful coatings or a Decograin

Door operators

Enjoy extra convenience and security: Hörmann operators for garage doors and entrance gates.

Steel security doors

Hörmann provides you with safe and sturdy security doors in various grades. There will be one to fit your needs.

Steel doors

Sturdy doors for your entire home, from the basement to the







www.hoermann.com


All rights reserved. No part may be reproduced without our prior permission. Subject to changes.

www.hoermann.com









Hörmann KG Amshausen, Germany

Hörmann KG Antriebstechnik, Germany

Hörmann KG Brockhagen, Germany









Hörmann KG Dissen, Germany

Hörmann KG Eckelhausen, Germany

Hörmann KG Freisen, Germany

Hörmann KG Ichtershausen, Germany









Hörmann Alkmaar B.V., Netherlands

Hörmann Legnica Sp. z o.o., Poland

Hörmann LLC, Montgomery IL, USA

Hörmann Flexon LLC, Burgettstown PA, USA









Hörmann Beijing, China

Hörmann Tianjin, China

Hörmann Changshu, China

Shakti Hörmann Ltd. India

Hörmann is a professional manufacturer worldwide that offers you a complete range of major building products from one source. We manufacture in specialized factories using the advanced production technologies.

The comprehensive manufacturing, sales and service network in Europe, Asia and America makes Hörmann your strong international partner for the high-quality construction.

"Quality without Compromise".

GARAGE DOORS

OPERATORS

DOORS

PARTITION WALLS

INDUSTRIAL DOORS

LOADING TECHNOLOGY

